




BARRACUDA MOTOR FAMILY DIMENSIONAL OUTLINES:

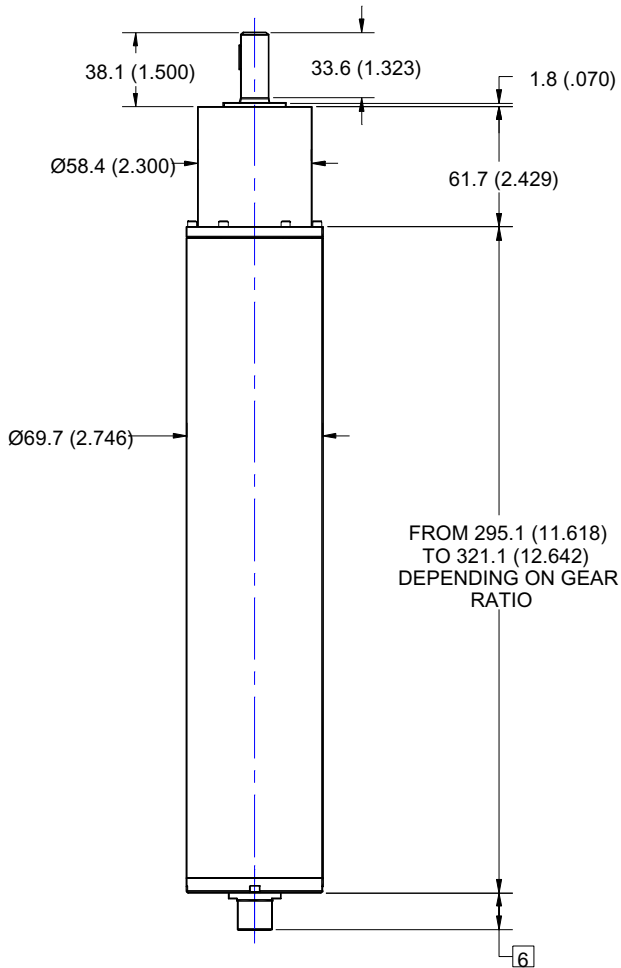

1. A wide variety of gear ratios are available to choose from. Consult manufacturer.
2. Continuous output torque range from 10 Nm (88.5 lb-in) to 30 Nm (266 lb-in). Intermittent range from 18 Nm (159 lb-in) to 50 Nm (443 lb-in).
3. Safety couplings are an available option. They are set to maximum intermittent output torque.
4. Choice of hall sensor or frameless resolver primary feedback. Optical encoder with up to 1024 CPR is available as secondary feedback option. Consult manufacturer for specific application.
5. Teflon or polyethylene seal is standard. Other seal materials are available on request. Consult manufacturer.
6. Consult with manufacturer for connector and cabling options.

Dimensions are in mm (in.).
 Dimensions with no tolerance indicated are as follows:
 For Dimensions: Tolerance:
 Less than or equal to 6 mm +/-0.1mm (.0039 in.)
 Less than or equal to 30 mm +/-0.2mm (.0079 in.)
 Less than or equal to 120 mm +/-0.3mm (.0118 in.)

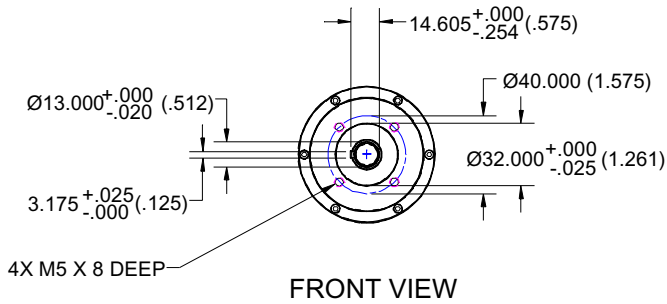